



AbraxSys
RUGGED LCD SOLUTIONS


15" Sunlight Readable Industrial Grade IP65 (NEMA 4) Touch Screen LCD Flat Panel Computer

SPC2-PM-150



This series of rugged sunlight readable 1600 nits brightness panel PCs is the ultimate solution for outdoor embedded computing and are ideally suited for high ambient light environments where dust, dirt, moisture, splashing water, hose directed spray, and various other caustic contaminants like oil, chemicals, etc. are commonplace. This advanced series features Standard: Intel 11th Generation Core I5-1145GRE (8M Cache, up to 4.10 GHz), 240GB Solid-State Drive (higher capacity available), 8GB memory (expandable to 32GB), a vast array of I/O and Ethernet ports, Intel's Skylake graphics chipset, solid-state long-life LED backlighting, solid-state storage devices, and exceptional temperature ranges: Operating Temperature: -20°C to 60°C (-4°F to 140°F), Storage Temperature: -40°C ~ 75°C (-40°F ~ 167°F).

As well, a multitude of add-on features are available to meet our customer's specific requirements.

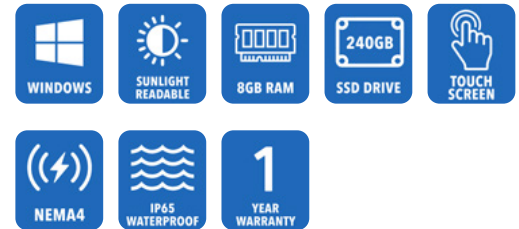

Technical Specifications

Computer Specs

CPU

- Intel® Core™ I5-1145GRE (up to 4.1GHz, quad-core, 8M Cache, TDP: 28/15/12W)
- Tiger Lake 11th generation Intel Core processors

Chipset

I/O Chipset EC iTE IT8528E

Graphics Chipset

Intel® Iris® Xe Graphics, 12th Generation

Intel's Boost Technology

Max Turbo Frequency of 4.10 GHz

Storage

240GB Solid State [Optional larger capacity drives also available]

Memory

8GB expandable to 16GB or 32GB

I/O

- USB:
 - 4xUSB 3.0
 - 4xUSB 2.0
- Com Port:
 - 2 x RS-232/422/485
 - 4 x RS-232 Out (other ports available, please let us know what is needed)

Ethernet

- 1 x Intel® I225IT 2.5 Gigabit Ethernet (LAN2), 1 x Intel® I219LM Gigabit Ethernet PHY (LAN1),
- 3 x USB3.1 Gen2, 1 x USB 3.1 Gen1 at I/O

Operating System

Windows 10 IOE Enterprise Operating System [Optional Win 10 Pro or Win 11 Pro also available]

General

Model

SPC2-PM-150

Display Size

15.0"

Display Type

Long-Life Industrial Grade Active Matrix TFT LCD

Backlight Technology

Solid State, Long-Life LED, with Light Source Redundancy

Optical Films Enhancements

Boosts efficiency of the backlight's light utilization and minimizes the surface reflection of ambient light. The result is a transmissive enhancement that features higher contrast and a wider range of colors, even in bright outdoor light, than traditional reflective LCDs.

Brightness

1600 nits (cd/m2)

Dimming Capabilities

Optional Full-Range Manual Turn-Pot, Automatic Dimming Sensor, Remote Dimming, Standard

Contrast Ratio

800:1

Aspect Ratio

4:3

Resolution

1024 x 768 (XGA) Native

Colors Supported

16 million

Viewing Angles

-80° / 80° Horizontal
-70° / 70° Vertical

Power Types

90 VAC to 264 VAC; 12V DC; 24V DC; 9 to 36V DC; or 20 to 53V DC

Physical Attributes

Front Bezel

High Grade 6061T Aluminum, Electrochemical Anodized for added Corrosion Resistance, Black Textured Finish per Military Standards FED-STD-595

Rear Enclosure

High Grade 6061T Aluminum, Electrochemical Anodized for added Corrosion Resistance, Black Textured Finish per Military Standards FED-STD-595

Panel Mounting

10-32 Stainless Mounting Studs, 1/2" Exposed Thread

Overall Dimensions

13.64 x 16.50 x 3.00 in
(346.45 x 419.10 x 66mm)

Cutout

12.2 x 15.06
(309.88 x 382.53mm)

Weight

15 lbs. (6.8 Kg)

Sealability

NEMA 4 (IP65)

Sunlight Readability

The latest optical technology for high ambient light conditions

Warranty Period

1 Year

Environmental

Sunlight Readability

The latest optical technology for high ambient light conditions

Operating Temperature Range

-20°C to 60°C (-4°F to 140°F)

Storage Temperature

-40°C ~ 75°C (-40°F ~ 167°F)

Humidity

5% to 95% RH (non-condensing)

Shock

Operating: 30g's, 11ms, 1/2 Sine

Vibration

1g RMS 20-500Hz

Fasteners

Vibration-proof, self-locking, fastener system

EMI

FCC Class B pursuant to Part 15 of the FCC Rules

Agency Compliance

CE

Altitude

Operating 0 to 10,000 ft.
Storage 0 to 40,000 ft.

RoHS Compliant

Yes

Rating

NEMA 4 / IP65

Additional Add-On Options

Touch Screen Technology

Resistive

Multi-Touch Up to 10-Point PCAP

Hardened Armored Touch Technology

Power Type Choices

90 VAC to 264 VAC; 12V DC; 24V DC; 9 to 36V DC; or 20 to 53V DC

Extended Operational Temperature Ranges

Conformal Coating of all Internal Circuit Boards

Private Labeling Services

Dimming Capabilities

Standard, or Optional Full-Range Manual Turn-Pot, Automatic Dimming Sensor, Remote Dimming

Optional O/S

Windows 10 PRO or 11 PRO


Larger Storage Devices

NEMA 4X IP66 Stainless Steel Front Bezel

Wi-Fi (wireless networking technology)

Customization Services

Mechanical Drawings

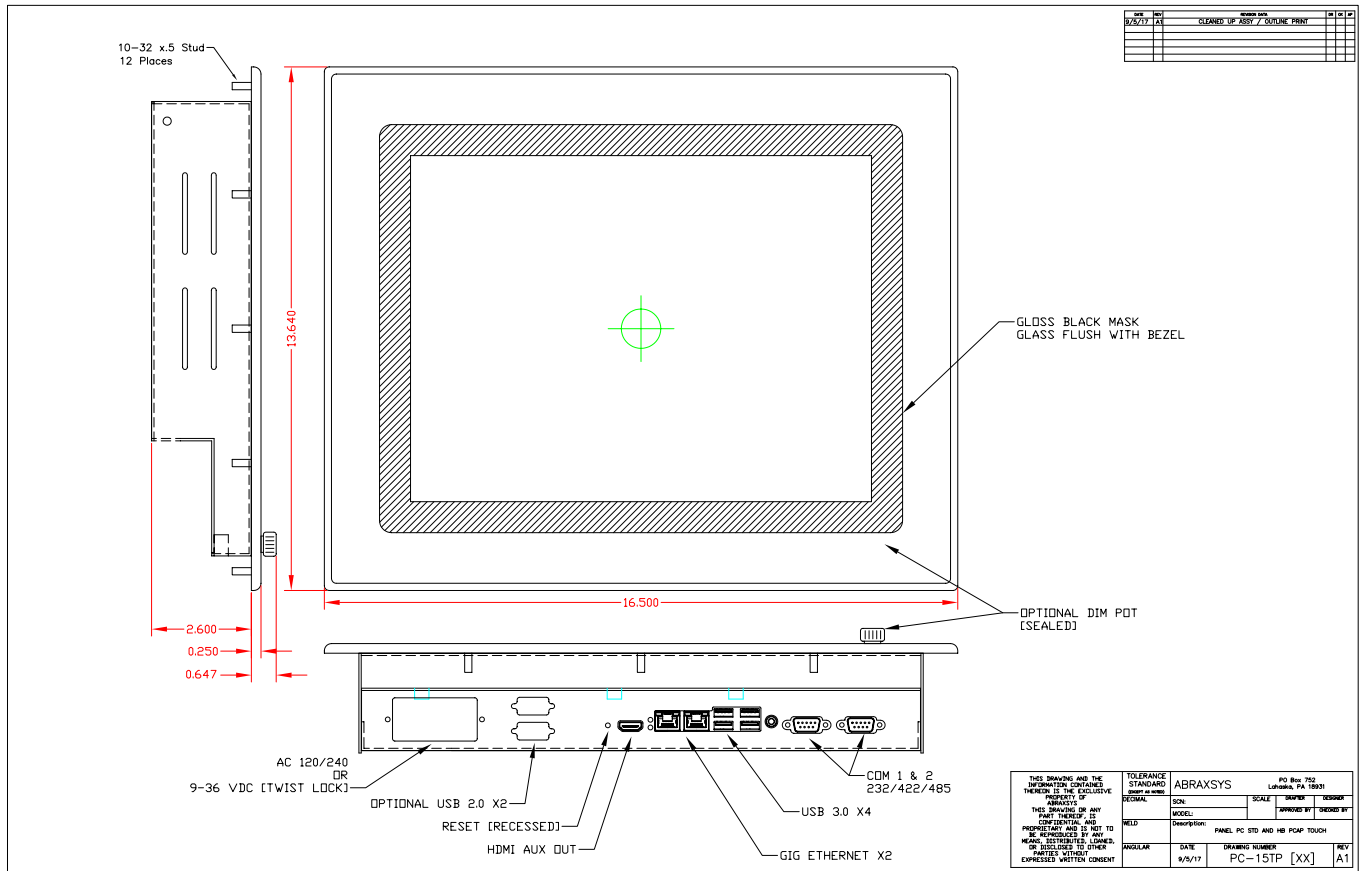

These technical and mechanical resources are subject to change without notice.



AbraxSys
RUGGED LCD SOLUTIONS

(800) 883-9050

info@abraxsyscorp.com

www.abraxsyscorp.com

6161 Keller's Church Road, Units 6151B, 6161A, 6161B, 6171A & 6171B
Pipersville, Pennsylvania 18947 U.S.A.