





AbraxSys
RUGGED LCD SOLUTIONS

21.5" Industrial Grade NEMA 12 (IP52) VESA Mount LCD Flat Panel Display

Model VM-215

Model VM-215 LCD monitor is a NEMA 12 (IP52) rated product and utilizes the latest 21.5" True High-Definition 1920 x 1080 TFT Flat Panels and features wide viewing angles, exceptional colors and contrast, CR 5000:1. AbraxSys has added a versatile Analog-Digital interface board, backlight inverter and OSD controls. All elements, including a toughened glass protective screen have been packaged in a compact, rugged metal housing. The result is a flexible Display Head, ready for integration as part of any system; as an analog monitor, or a touchscreen driven human-machine interface.

This rugged model offers exceptional shock and vibration safeguards and its housing is constructed of high grade aluminum which has been dipped in zinc-chromate and then finished with a resilient corrosive resistant thermal-set black powder-coating. This product is very ruggedly built, features long-life displays with no scheduled End Of Life. Incorporating the latest LCD and control electronics you are assured a display the will perform reliably in harsh industrial environments. Many configurations available, including our [Sun Readable SRD models](#).

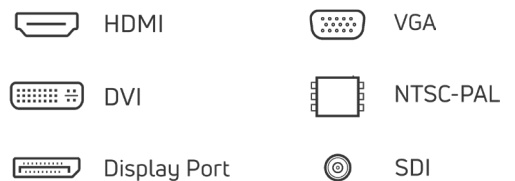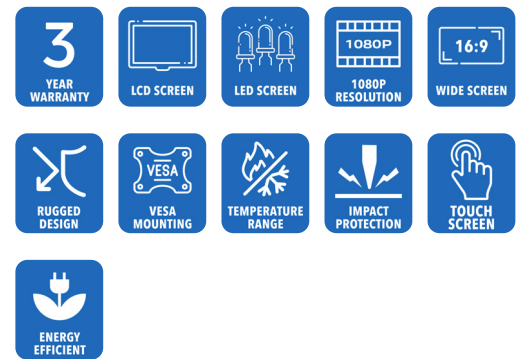

Technical Specifications

General

Model
VM-215

Display Size
22.5"

Display Type
Long-Life Industrial Grade LCD

Backlight Technology
Solid State, Long-Life LED –
[CLICK HERE](#) for more information

Brightness
400 nits (cd/m2)

Contrast Ratio
5000:1

Aspect Ratio
16:9

Resolution
1920 x 1080 (1080p)

Colors Supported
16.7M (8-bit/color)

Viewing Angles
-89 to 89 Horizontal
-89° to 89° Vertical

Video Inputs
DVI, HD15 (VGA), DisplayPort,
Composite, S-Video, HD-SDI, HDMI

User Controls
Multi-Functional User Keypad

Protective Window
3mm Hardened Protective
Window, for more information
[CLICK HERE](#)
(also available various optional
Touch Screen Technologies)

Power Types
90 VAC to 264 VAC, 12V DC, 24V
DC, 9 to 36V DC, 20 to 53V DC

Physical Attributes

Overall Dimensions
8.939 x 10.624 x 2.070 in

Panel Mounting
12.74 x 20.89 x 3.04 in
(323.69 x 530.64 x 77.39mm)

Cutout
9.28 x 7.78 in (235.8 x 197.7mm)

Warranty Period
3 Years

Environmental

Operating Temperature Range
-20°C to 70°C (-4°F to 158°F)

Storage Temperature
-20°C to 70°C (-4°F to 158°F)

Humidity
5% to 95% RH (non-condensing)

Shock
Operating: 30g's, 11ms, ½ Sine,
Non-Operating: 200G, 2ms, half
sine wave, 1 time for ± X, ± Y, ± Z.

Vibration
Operating: 1g RMS 20-500Hz,
Non-Operating: 1.5G, 10 ~ 300 Hz,
10min/cycle, 3 cycles each X, Y, Z

Fasteners
Vibration-proof, self-locking,
fastener system which will not
loosen regardless of seat torque.
Designed to help make products
safer, lower warranty costs
and prolong equipment life by
eliminating vibration; increased
safety, reliability, operating life
and reduced maintenance.

EMI
FCC Class B pursuant to Part 15
of the FCC Rules

Agency Compliance
CE

Altitude
Operating 0 to 10,000 ft.
Storage 0 to 40,000 ft.

RoHS Compliant
Yes

Rating
NEMA 12 / IP52

Additional Add-On Options

Touch Screen Technology

Resistive

Multi-Touch Up to 10-Point PCAP

Hardened Armored Touch
Technology

Video Input Options

DVI, HD15 (VGA), DisplayPort,
HDMI, Composite, S-Video,
HD-SDI, and/or NTSC-PAL

Custom Video Modes

Extended Operational
Temperature Ranges

Conformal Coating of all
Internal Circuit Boards

Power Type Choices

90 VAC to 264 VAC; 12V DC; 24V
DC; 9 to 36V DC; or 20 to 53V DC


Private Labeling Services

Customization Services

Dimming Capabilities

User Keypad (standard); Optional:
Manual Full-Range, Automatic
Dimming, or Remote Dimming

Mechanical Drawings

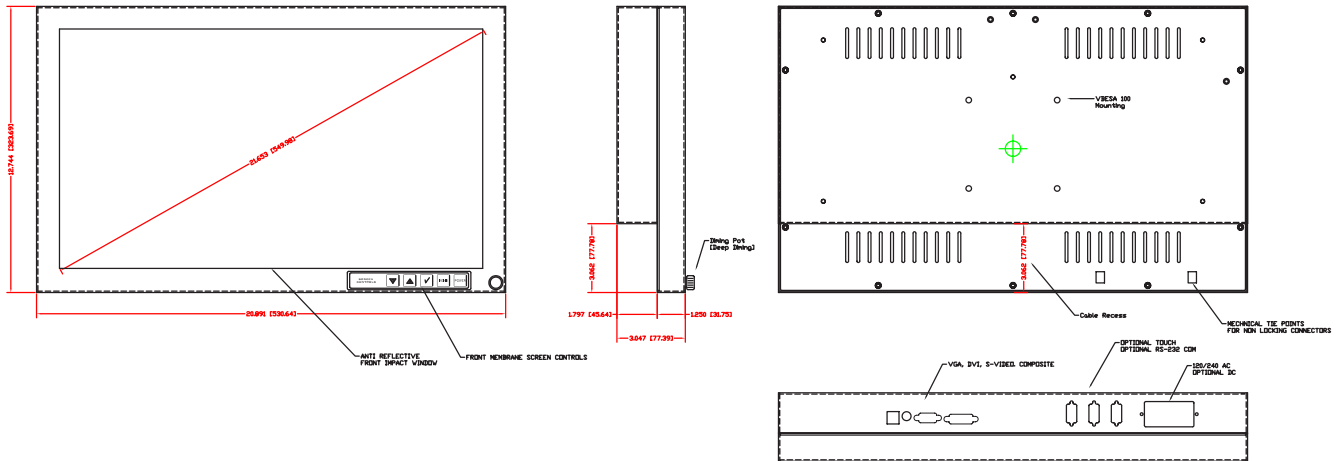

These technical and mechanical resources are subject to change without notice.



AbraxSys
RUGGED LCD SOLUTIONS

(800) 883-9050

info@abraxsyscorp.com

www.abraxsyscorp.com

6161 Keller's Church Road, Units 6151B, 6161A, 6161B, 6171A & 6171B
Pipersville, Pennsylvania 18947 U.S.A.